

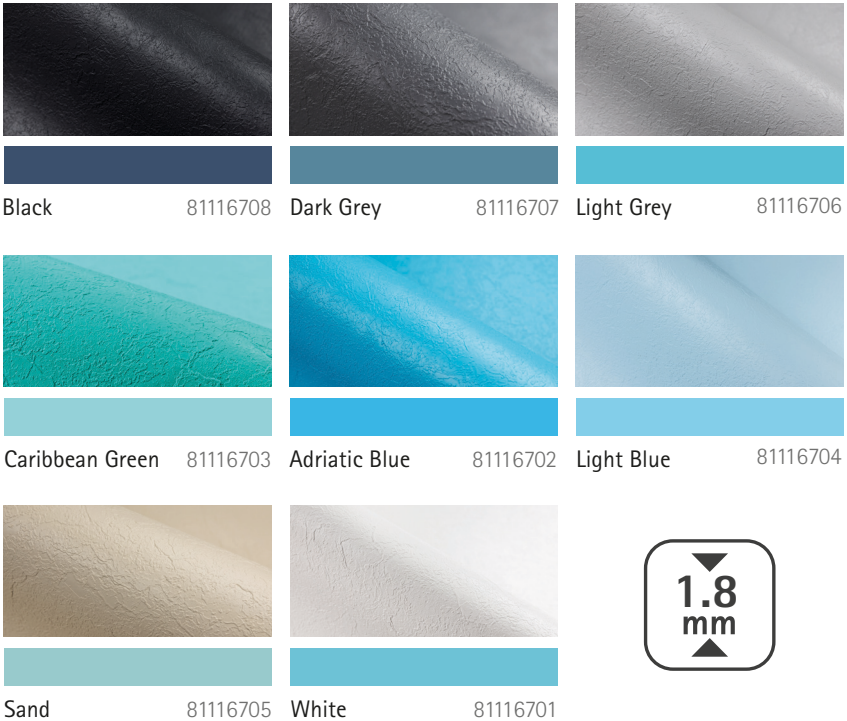


PVC Reinforced membrane · RELIEF



Packaging



Rolls must be stored **horizontally** in the **original packaging**, in a **dry environment** and at moderate ambient temperature (**15-25°C**)

PVC Seam Sealer



6 units/box 900gr/unit

Black	81024014	Light Blue	81032001
Dark Grey	81029003	Sand	81054001
Light Grey	81029001	White	81035001
Green	81034001	Transparent	81037001
Adriatic Blue	81039001		

Geotextile



Raw material: Polypropylene
400 gr/m² · Light Blue

1.5mm thickness - 6 rolls/pallets

81006005* | 1,5m x 50m

81006006 | 1,65m x 50m

81006007 | 2m x 50m

* Specifically for butt welding.

Butt Weld Backing Strip



Colour: Dark Grey

81113T20 15cm x 20m | 1.5mm thickness

TECHNICAL SPECIFICATIONS

Slip resistance



Class C ($\geq 24^\circ$)
under DIN-EN 16165 A



Pendulum Test
This collection has the **highest anti-slip certification**, to ensure safety inside the water.
Class 3 ($>45^\circ$)
under UNE-EN 16165 C



Passes ANSI A326.3
($\geq 0,42$)

Security



Security membranes
under EN71-3 safety for toys.

Guarantee



Guarantee
10 years of Watertightness.